

ACTECH

PROTECTIVE COATINGS

ACTFLEX Polycrete

ACTFLEX Polycrete Screed and Patching Additive 20kg



Main Features



The only screed mix that bonds to polyurethane membranes



Fast drying time



Dry to a strength of 50+ MPa



Can be used for screed, ramps, hobs, and patching

✓ Durable
✓ High Tensile Strength

ALL-IN-ONE SOLUTION

1mm to 80mm

Upgrade your Flooring Experience with **ACTFLEX POLYCRETE** today!

02 8021 3517

www.atechprotectivecoatings.com.au




Mixing Ratios



6:1 Ratio (6 Part Aggregate, 1 Part Polycrete)

ACTFLEX POLYCRETE LIQUID RATIO

2.4L
of ACTFLEX
POLYCRETE
Liquid

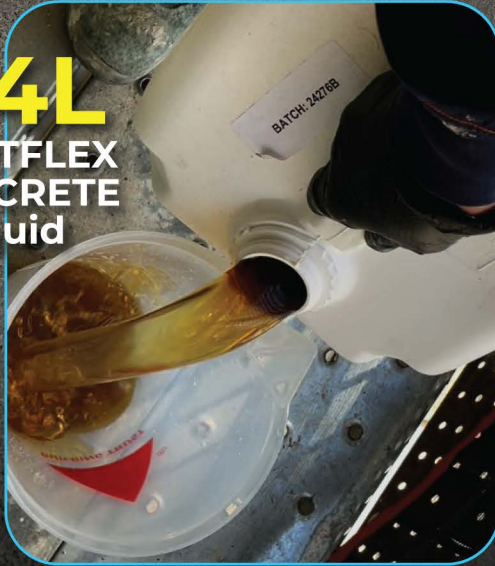

20kg
of dry
sand-cement
mix



Achieve Optimal
Results with
3:1 or 4:1
Traditional Sand
and Cement Mix Ratios

APPLICATION PROCESS



Mix well



Prime the surface
with Polycrete



Apply the mix to the
the wet primer surface



Apply to
desired thickness



Application Technique

Work within a 30-40 minute timeframe after mixing, ensuring thorough application using a steel float trowel for best results.



Coverage

POLYCRETE screed mix does an average of 2 square meters per 20 kg mix at 10mm thickness.