

SECTION A–A

TAP BODY THROUGH A LINED SHOWER WALL (NTS)

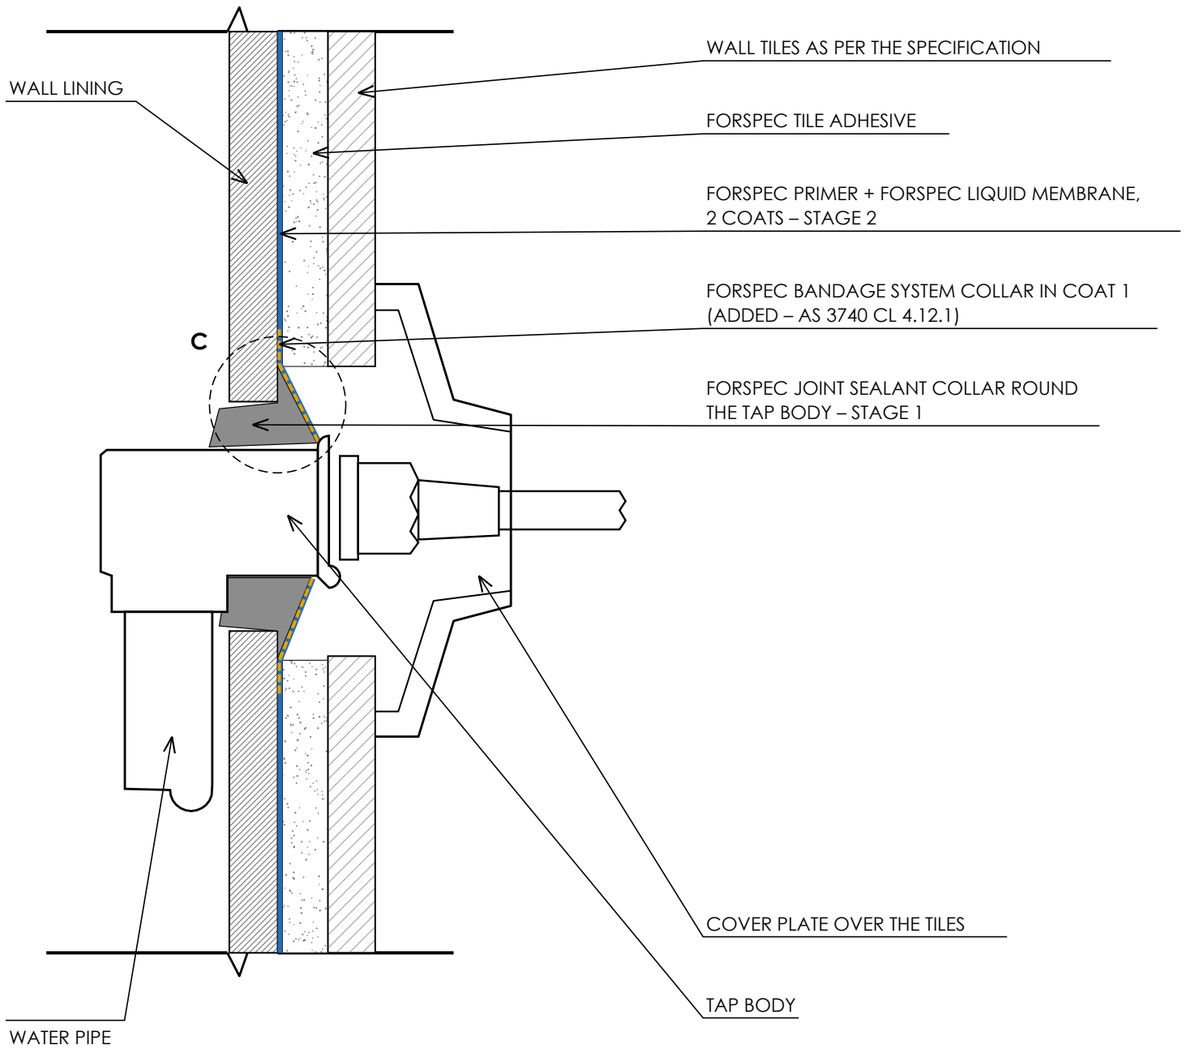


VIEW B–B

ELEVATION ON THE TAP PENETRATION – TILE CUT BACK (NTS)

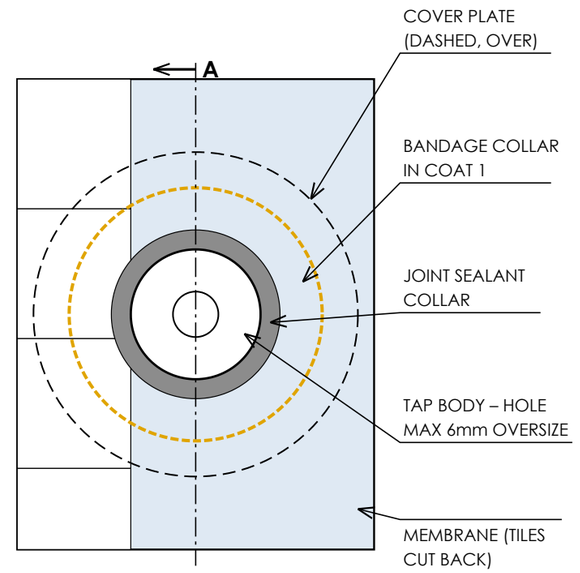

DETAIL C

MEMBRANE COLLAR AT THE TAP BODY – ENLARGED (NTS)

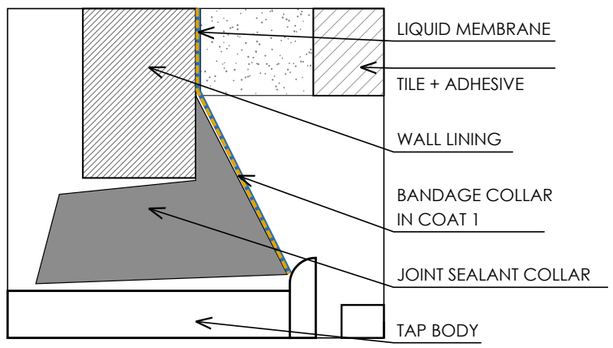

NOTES

1. AS 3740 ROUTE (NCC H4D3(b)(i)); HP 10.2.1–10.2.6 EXTENTS + 10.2.12 FALLS APPLY ON BOTH ROUTES. READ WITH AS 3740, THE FORSPEC SPECIFICATION AND CURRENT TDS. LABELS GENERIC – MEMBRANES AS SPECIFIED.

STAGE 1 – PENETRATION

2. CUT THE HOLE FOR THE TAP BODY MAX 6mm OVERSIZE. FIX THE TAP BODY TO THE FRAMING SO IT CANNOT MOVE.
3. FILL THE GAP AND FORM A FORSPEC JOINT SEALANT COLLAR ROUND THE TAP BODY.

STAGE 2 – MEMBRANE

4. PRIME (FORSPEC PRIMER). APPLY COAT 1 AND EMBED A FORSPEC BANDAGE SYSTEM COLLAR (OR PRE-FORMED COLLAR) ROUND THE TAP BODY, TURNED ONTO IT.
5. APPLY COAT 2 OVER, MIN 10mm ONTO THE TAP BODY. KEEP MEMBRANE AND SEALANT OFF THE SPINDLE HOUSING: IT MUST COME OUT FOR WASHER / CARTRIDGE SERVICE WITHOUT DAMAGING THE SEAL (NCC HOUSING PROVISIONS 10.2.23(b), AS 3740 CL 4.12.1).

STAGE 3 – TILING

6. TILE WITH FORSPEC TILE ADHESIVE, CUT BACK ROUND THE TAP BODY. FIT THE COVER PLATE OVER THE TILES (A MIXER COVER PLATE MAY DRAIN AT ITS BASE, AS 3740 CL 4.12.1 NOTE 3).

GENERAL

7. HOLD POINT: INSPECTION AND PHOTOS OF EVERY PENETRATION COLLAR BEFORE TILING.
8. AMENDED FROM THE ORIGINAL TO COMPLY: TAP PENETRATION SEALED WITH A PRE-FORMED FLANGE (COLLAR) (AS 3740 CL 4.12.1).
9. FORSPEC MAY REQUIRE AN ALTERNATE WATERSTOP BASED ON DESIGN CONDITIONS.

FORSPEC®
PROTECTIVE COATINGS

TAP PENETRATION - SEALANT AND BANDAGE COLLAR IN THE MEMBRANE

FORSPEC STANDARD DETAIL - SUPERSEDES B114 REV C

COPYRIGHT. ALL RIGHTS RESERVED. CANNOT BE REPRODUCED OR COPIED IN ANY FORM WITHOUT THE WRITTEN PERMISSION OF FORSPEC. ANY LICENSE EXPRESSED OR IMPLIED, TO USE THIS DOCUMENT FOR ANY PURPOSE WHATSOEVER IS RESTRICTED TO THE TERMS OF THE AGREEMENT

SCALE	DRAWING No	REFERENCE	REVISION
NTS	B114	B114 REV C	E
DATE	DESIGNED BY	DRAWN	CHECKED
09/11/2026	JG	JG	—