

PLAN

LAUNDRY / POWDER ROOM – FLOOR MEMBRANE (NTS)

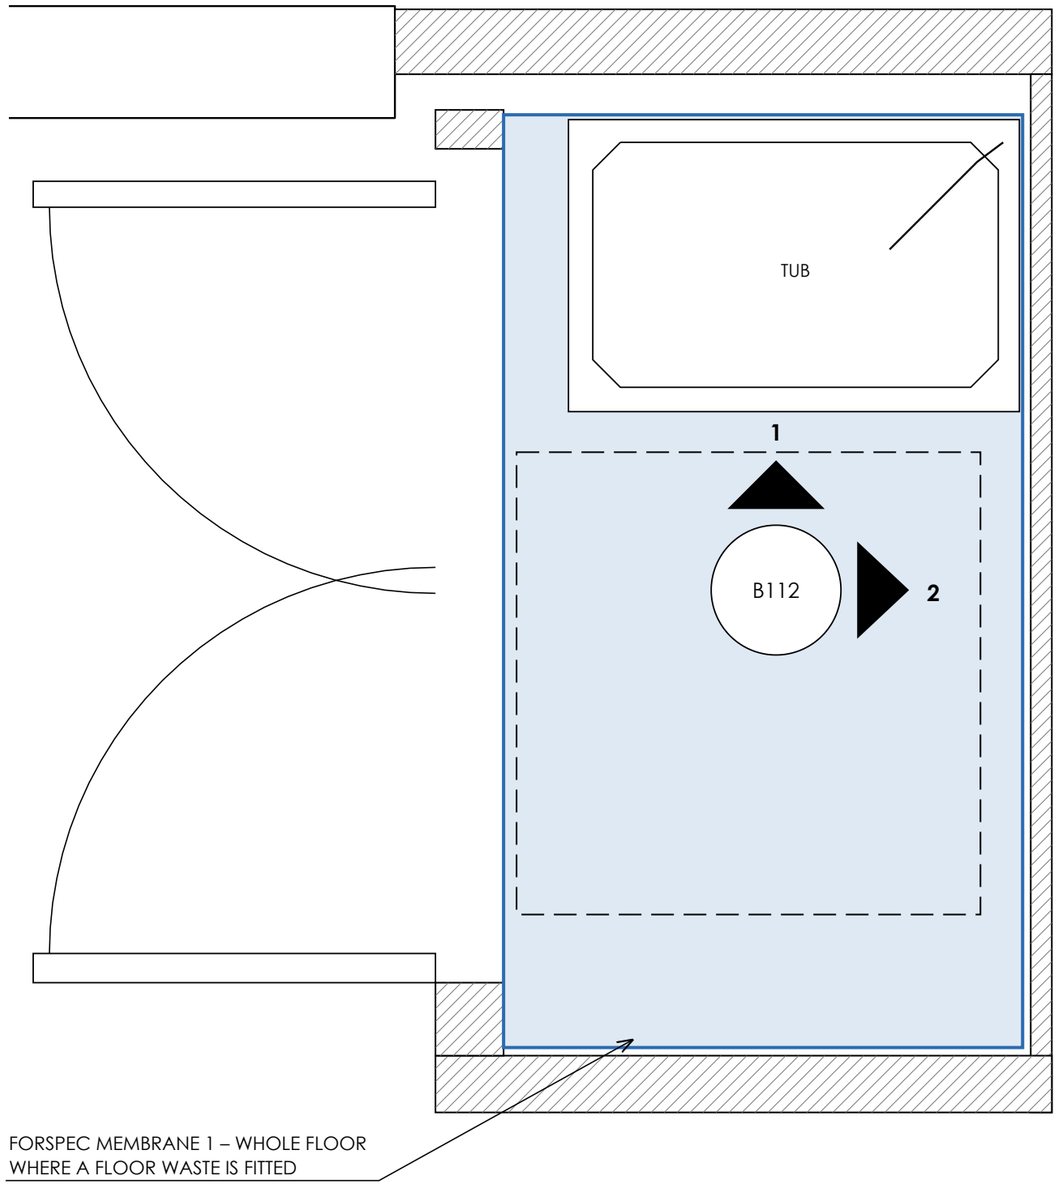


VIEW B–B

ELEVATIONS 1 AND 2 – WALL MEMBRANE ZONES (NTS)

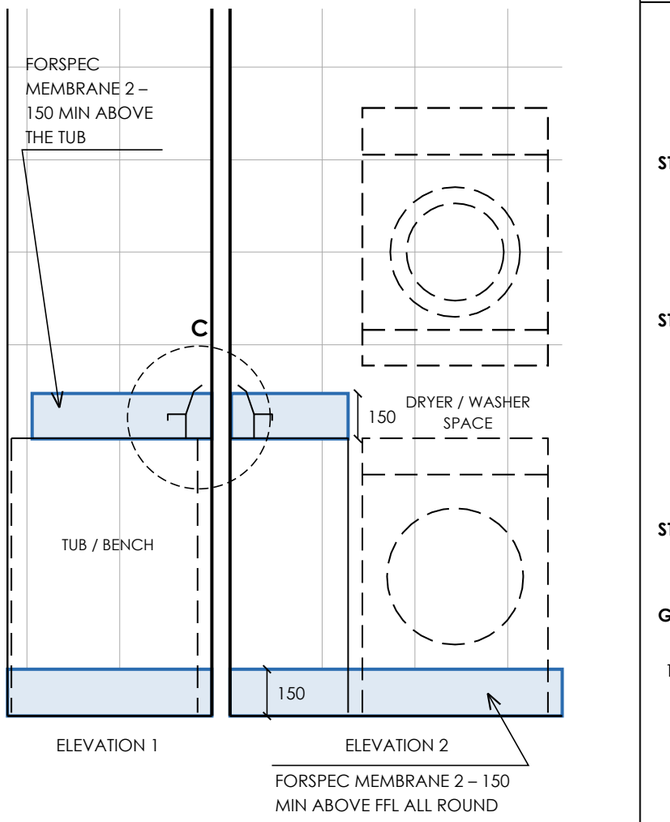

DETAIL C

TUB, TAPS AND CORNER – ENLARGED FROM B–B (NTS)

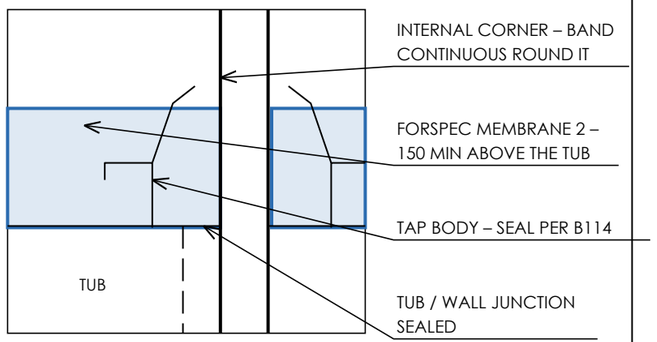

NOTES

1. AS 3740 ROUTE (NCC H4D3(b)(i)): HP 10.2.1–10.2.6 EXTENTS + 10.2.12 FALLS APPLY ON BOTH ROUTES. READ WITH AS 3740, THE FORSPEC SPECIFICATION AND CURRENT TDS. LABELS GENERIC – MEMBRANES AS SPECIFIED.
2. CONFIRM ZONES AGAINST THE CURRENT AS 3740 AND NCC.

STAGE 1 – FLOOR

3. WHERE A FLOOR WASTE IS FITTED, FORSPEC MEMBRANE 1 OVER THE WHOLE FLOOR, FALLING MIN 1:80, MAX 1:50 TO THE WASTE (NCC HOUSING PROVISIONS 10.2.12; VOL ONE F2D4). OTHERWISE PER AS 3740.
4. WATERSTOP ANGLE ACROSS THE DOOR OPENING PER B118.

STAGE 2 – WALLS

5. FORSPEC MEMBRANE 2 150mm MIN ABOVE FFL ALL ROUND (ELEVATIONS 1 AND 2).
6. WHERE A TUB OR BENCH ABUTS A WALL, MEMBRANE 150mm MIN ABOVE THE TUB / BENCH OVER ITS FULL LENGTH (ELEVATION 1, DETAIL C). SEAL THE TUB / WALL JUNCTION (NCC HOUSING PROVISIONS 10.2.5).
7. WATERPROOF EVERY TAP AND PENETRATION PER B114.

STAGE 3 – TILING

8. TILE WITH FORSPEC TILE ADHESIVE. BUILD-UP AT THE WALL / FLOOR PER B100 - B105.

GENERAL

9. HOLD POINT: INSPECTION AND PHOTOS BEFORE TILING.
10. FORSPEC MAY REQUIRE AN ALTERNATE WATERSTOP BASED ON DESIGN CONDITIONS.

FORSPEC®
PROTECTIVE COATINGS

LAUNDRY / POWDER ROOM -
MEMBRANE ZONES, FLOOR AND WALLS

FORSPEC STANDARD DETAIL - SUPERSEDES B112 REV C

COPYRIGHT. ALL RIGHTS RESERVED. CANNOT BE REPRODUCED OR COPIED IN ANY FORM WITHOUT THE WRITTEN PERMISSION OF FORSPEC. ANY LICENSE EXPRESSED OR IMPLIED, TO USE THIS DOCUMENT FOR ANY PURPOSE WHATSOEVER IS RESTRICTED TO THE TERMS OF THE AGREEMENT

SCALE	DRAWING No	REFERENCE	REVISION
NTS	B112	B112 REV C	E
DATE	DESIGNED BY	DRAWN	CHECKED
09/11/2026	JG	JG	—