

SECTION A–A

DOOR WATERSTOP ANGLE – WET AREA TO DRY ROOM (NTS)

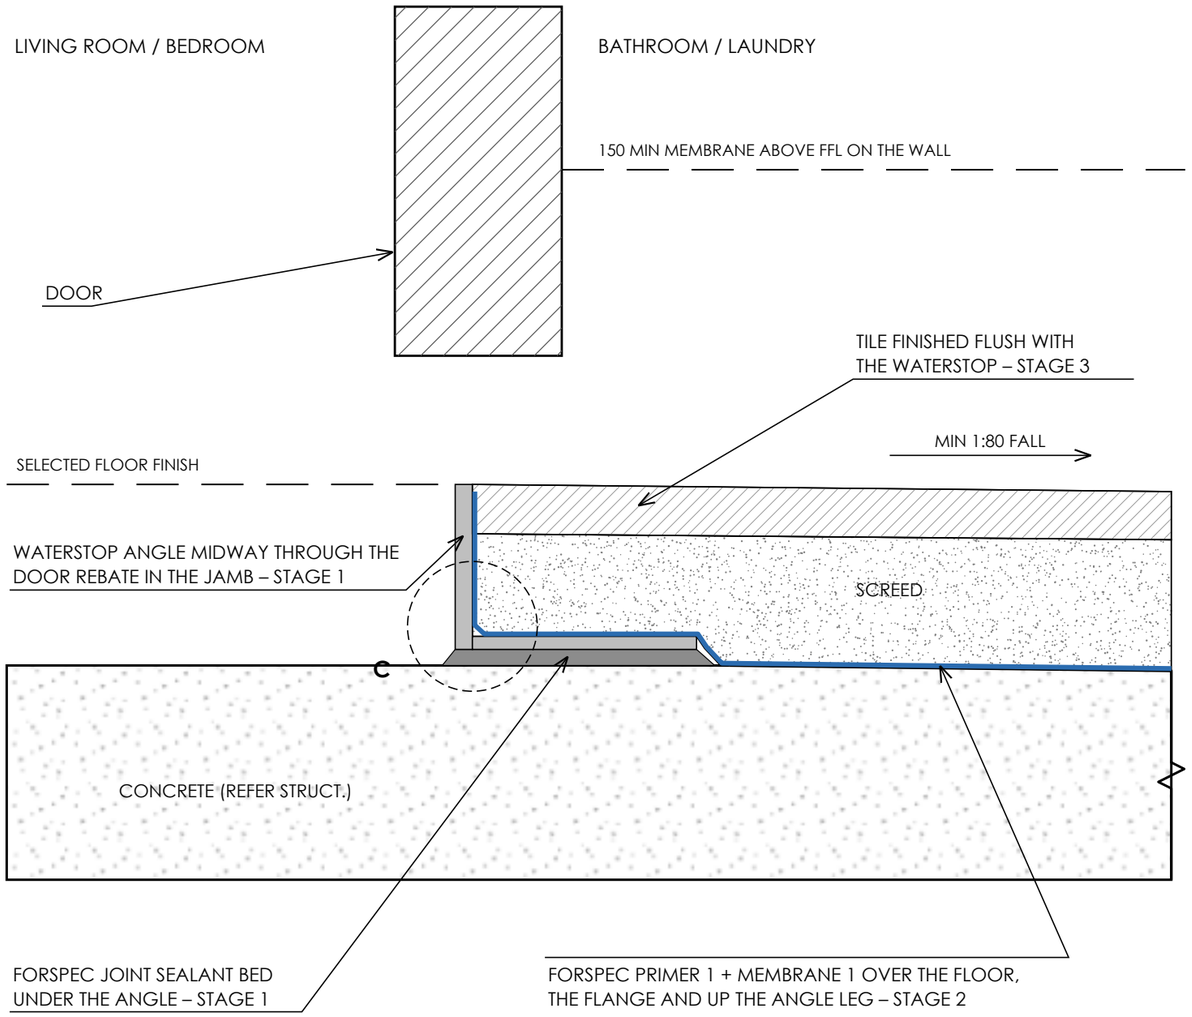


VIEW B–B

ELEVATION ON THE DOOR OPENING FROM THE WET SIDE (NTS)

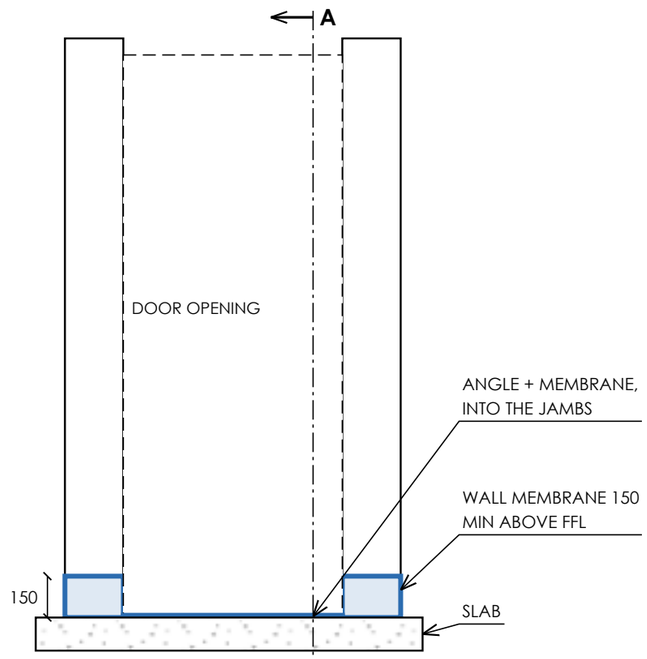

DETAIL C

ANGLE AT THE DOOR REBATE – ENLARGED (NTS)

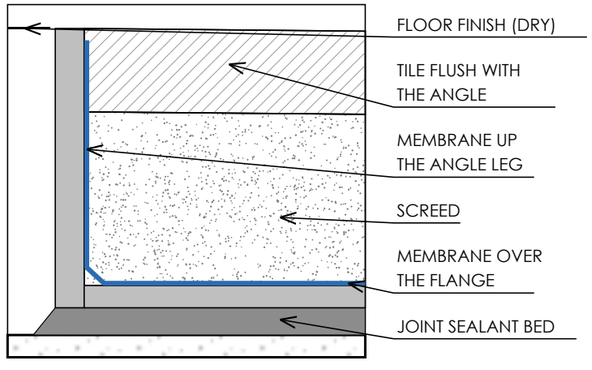

NOTES

1. AS 3740 ROUTE (NCC H4D3(b)(i)); HP 10.2.1–10.2.6 EXTENTS + 10.2.12 FALLS APPLY ON BOTH ROUTES. READ WITH AS 3740, THE FORSPEC SPECIFICATION AND CURRENT TDS. LABELS GENERIC – MEMBRANES AS SPECIFIED.

STAGE 1 – ANGLE

2. CONCRETE MIN 28 DAYS. SET THE WATERSTOP ANGLE IN A CONTINUOUS BED OF FORSPEC JOINT SEALANT ON THE SLAB, MIDWAY THROUGH THE DOOR REBATE IN THE JAMB, TOP OF LEG FLUSH WITH THE FINISHED FLOOR (NCC HOUSING PROVISIONS 10.2.24(c), AS 3740 CL 4.9.1), HORIZONTAL LEG MIN 50mm. NO FIXINGS THROUGH IT.

STAGE 2 – MEMBRANE

3. PRIME (FORSPEC PRIMER 1). FORSPEC MEMBRANE 1 OVER THE WHOLE WET-AREA FLOOR, OVER THE FLANGE AND UP THE WET FACE OF THE LEG TO ITS TOP, AND MIN 150mm UP ALL WALLS, SEALED TO THE ANGLE AND CONTINUOUS INTO THE WALL MEMBRANE AT THE JAMBS.

STAGE 3 – SCREED AND TILING

4. FORSPEC ENGINEERED SCREED TO FALLS AWAY FROM THE DOOR, THEN TILE WITH FORSPEC TILE ADHESIVE, FINISHED FLUSH WITH THE ANGLE.
5. FALLS MIN 1:80, MAX 1:50 TO THE FLOOR WASTES ON THE WET SIDE (NCC HOUSING PROVISIONS 10.2.12; VOL ONE F2D4). NO PONDING. THE DRY-ROOM FLOOR FINISH BUTTS THE ANGLE (BY OTHERS).
6. DOOR FRAME NOT EMBEDDED IN THE TILES; 2mm SEALED GAP UNDER THE ARCHITRAVE; UNDERSIDE OF THE JAMB AND ARCHITRAVE SEALED (AS 3740 CL 4.9.2). ANY JAMB BELOW THE TILE WATERPROOFED TO THE WATERSTOP (NCC HOUSING PROVISIONS 10.2.31).

GENERAL

7. HOLD POINT: INSPECTION AND PHOTOS OF THE ANGLE, SEALANT BED, EACH COAT (WFT) AND THE FLOOD TEST BEFORE SCREEDING.
8. AMENDED FROM THE ORIGINAL TO COMPLY: FALL MIN 1:80 TO THE FLOOR WASTE (NCC HP 10.2.12).
9. THE 150mm WALL UPTURN EXCEEDS THE HP PERIMETER FLASHING (25mm UP x 50mm, HP 10.2.24(a)). THE FLUSH WATERSTOP SUITS AN LHDS DOORWAY (LEVEL, LIP MAX 5mm – LHDS PART 3).
10. FORSPEC MAY REQUIRE AN ALTERNATE WATERSTOP BASED ON DESIGN CONDITIONS.

FORSPEC®
PROTECTIVE COATINGS

DOOR WATERSTOP ANGLE -
AT THE DOOR REBATE, MEMBRANE OVER THE ANGLE

FORSPEC STANDARD DETAIL - SUPERSEDES B118 REV C

COPYRIGHT. ALL RIGHTS RESERVED. CANNOT BE REPRODUCED OR COPIED IN ANY FORM WITHOUT THE WRITTEN PERMISSION OF FORSPEC. ANY LICENSE EXPRESSED OR IMPLIED, TO USE THIS DOCUMENT FOR ANY PURPOSE WHATSOEVER IS RESTRICTED TO THE TERMS OF THE AGREEMENT

SCALE	DRAWING No	REFERENCE	REVISION
NTS	B118	B118 REV C	E
DATE	DESIGNED BY	DRAWN	CHECKED
09/11/2026	JG	JG	—